


4. P.C. BOARD PATTERNS

Tuner Assembly (GWE-158)



FL Assembly (GWX-652)

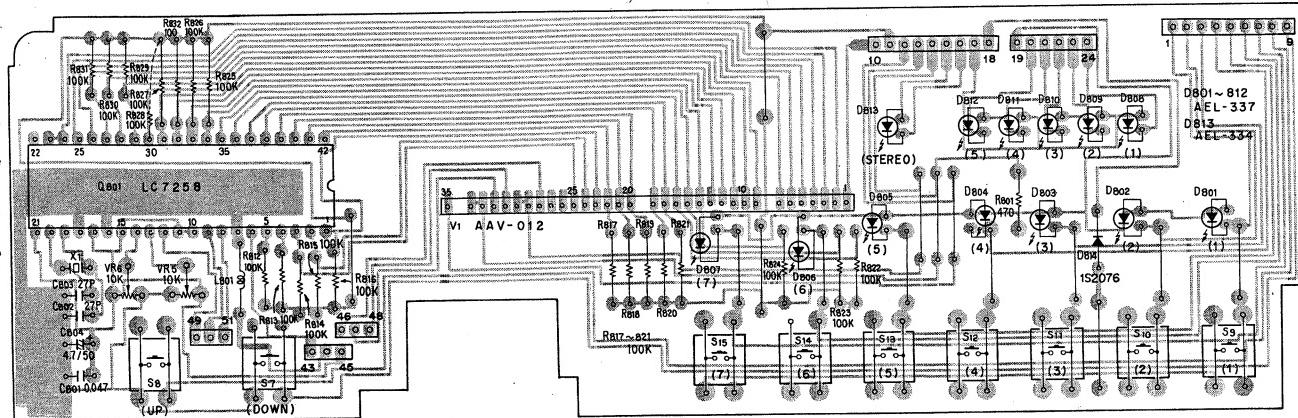

3. SCHEMATIC DIAGRAM

1


2

3

4

5

NOTE:
 The indicated semiconductors are representative ones only. Other alternative semiconductors may be used and are listed in the parts list.

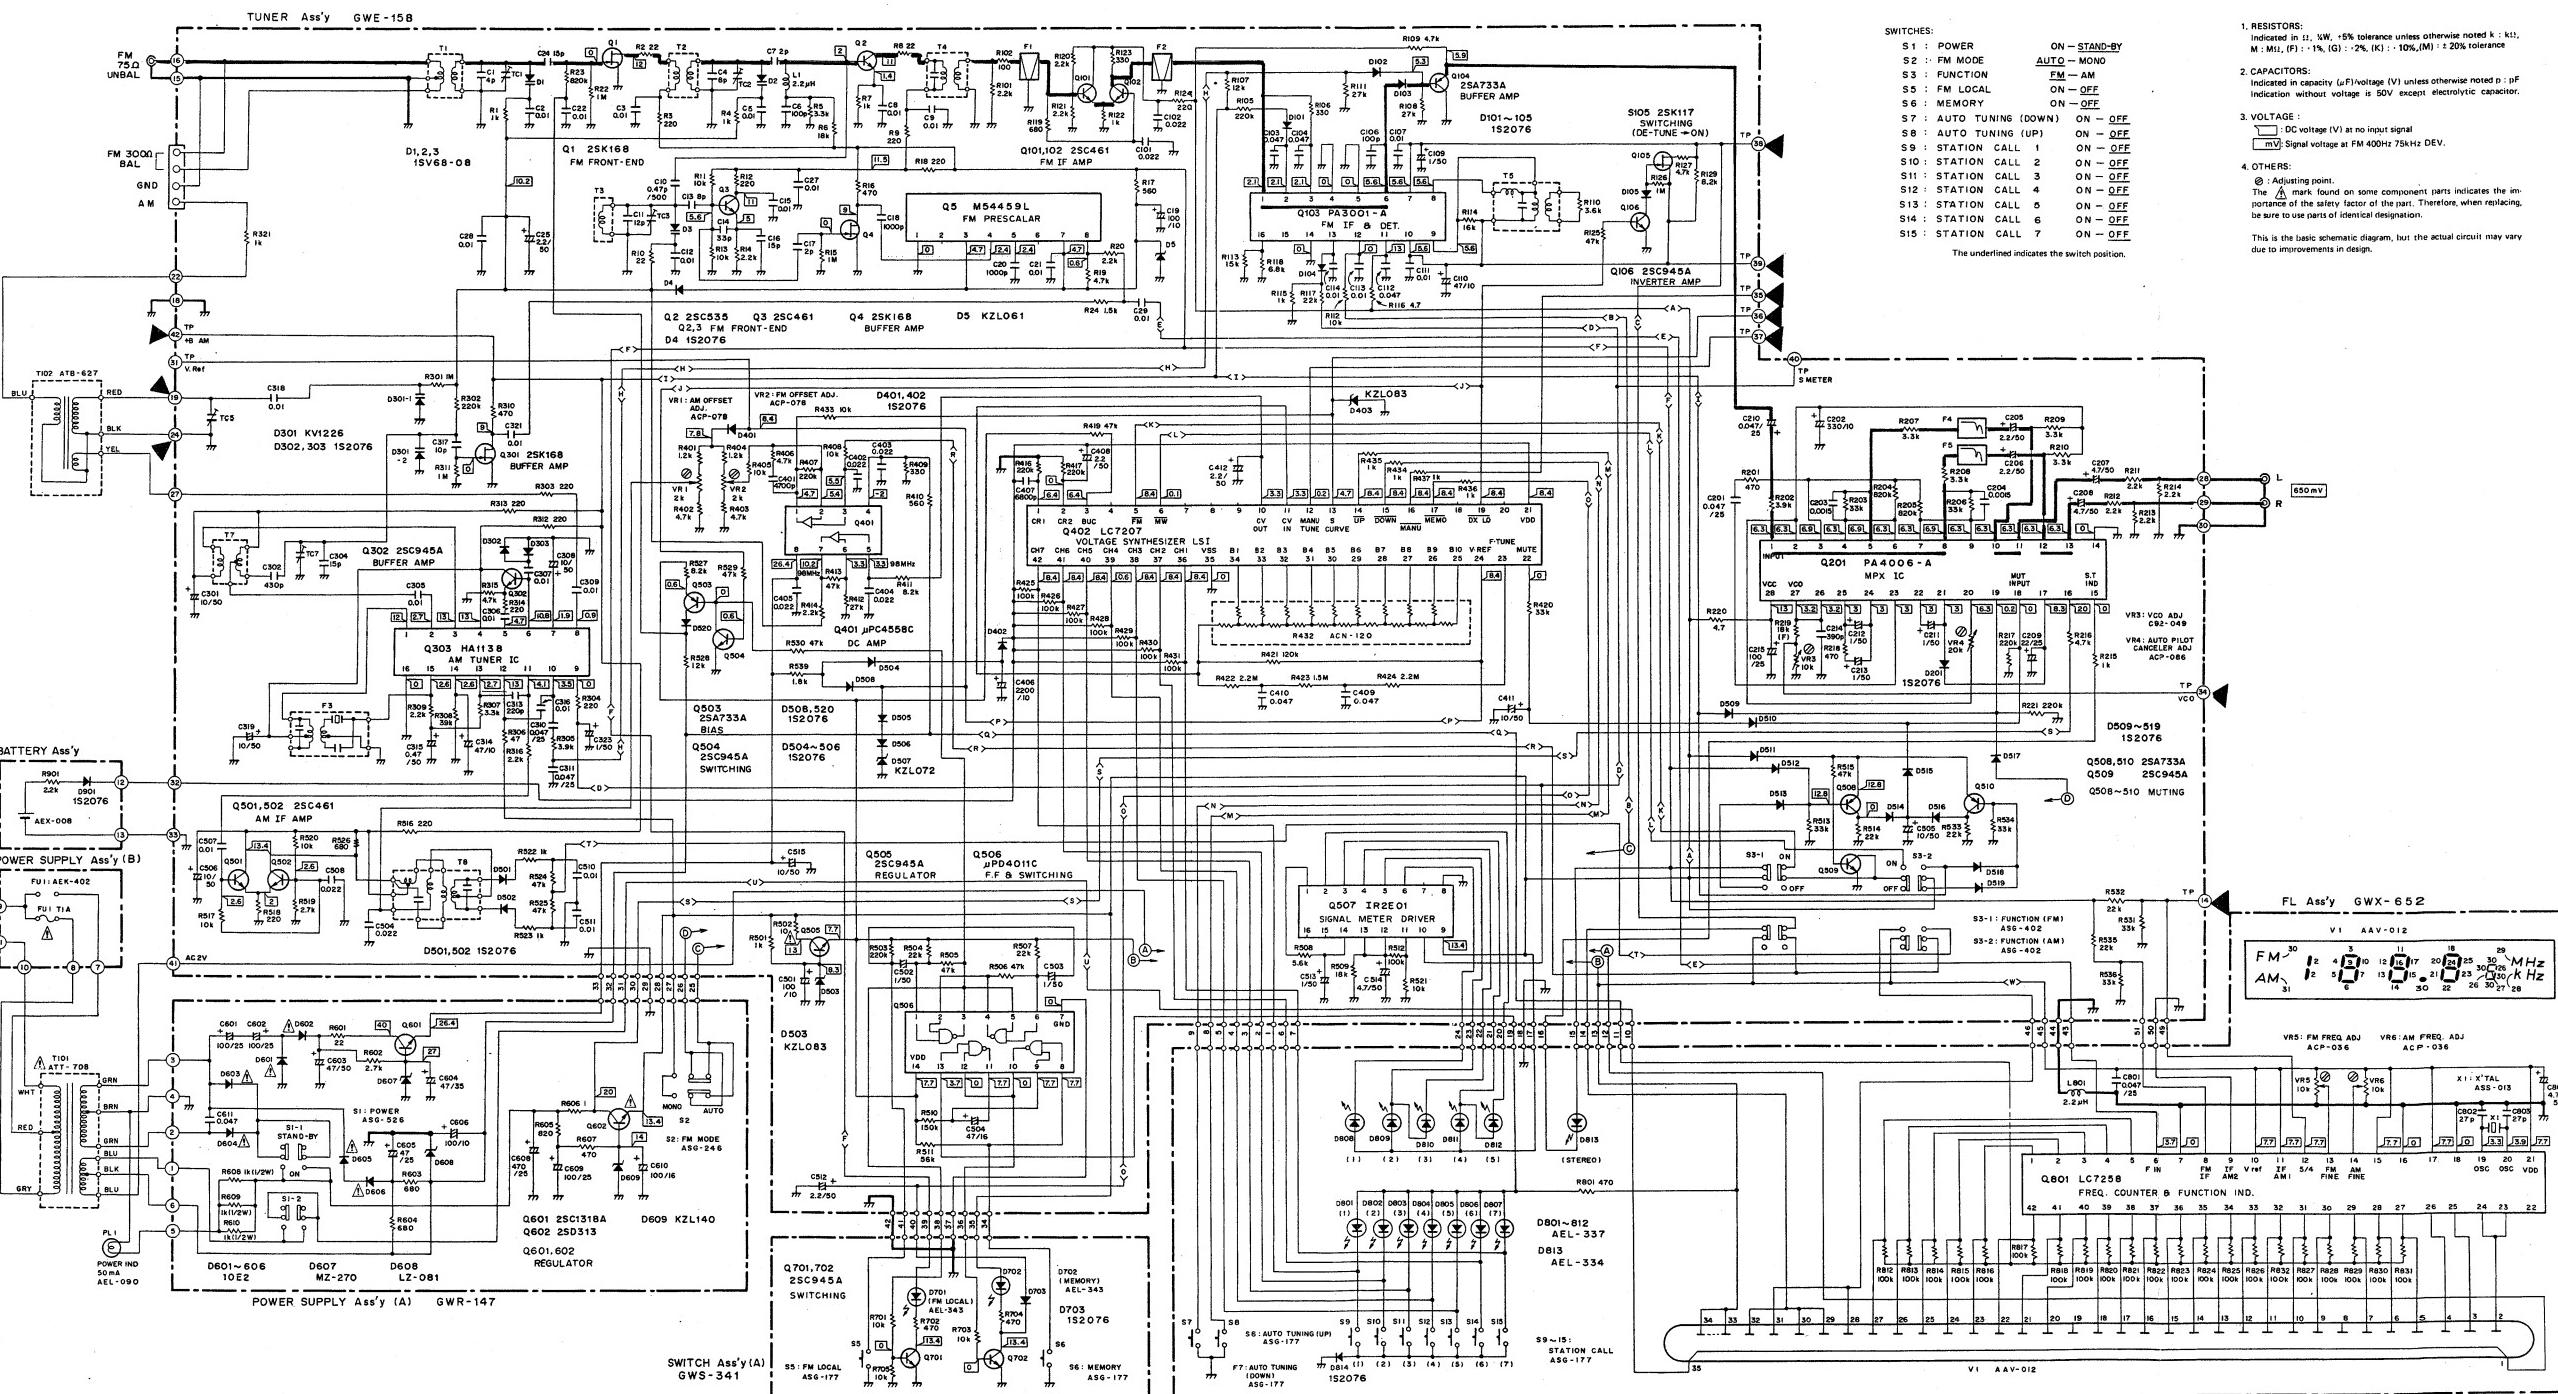

1. RESISTORS:
 Indicated in ohms (Ω). SW, +5% tolerance unless otherwise noted k : kΩ,
 M : MΩ, (F) : -1%, (K) : -2%, (M) : ±10%, (M) : ±20% tolerance

2. CAPACITORS:
 Indicated in capacity (μF) voltage (V) unless otherwise noted p : pF
 Indicated without voltage if 50V except electrolytic capacitor.

3. VOLTAGE :
 DC voltage (V) at no input signal
 (mV) Signal voltage at FM 400Hz 75kHz DEV.

4. OTHERS:
 (◎) Adjusting point
 The △ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.

The undefined indicates the switch position.

A**B****C****D****E**

1

2

3


4

5


6

4. P.C. BOARD PATTERNS


Tuner Assembly (GWE-158)

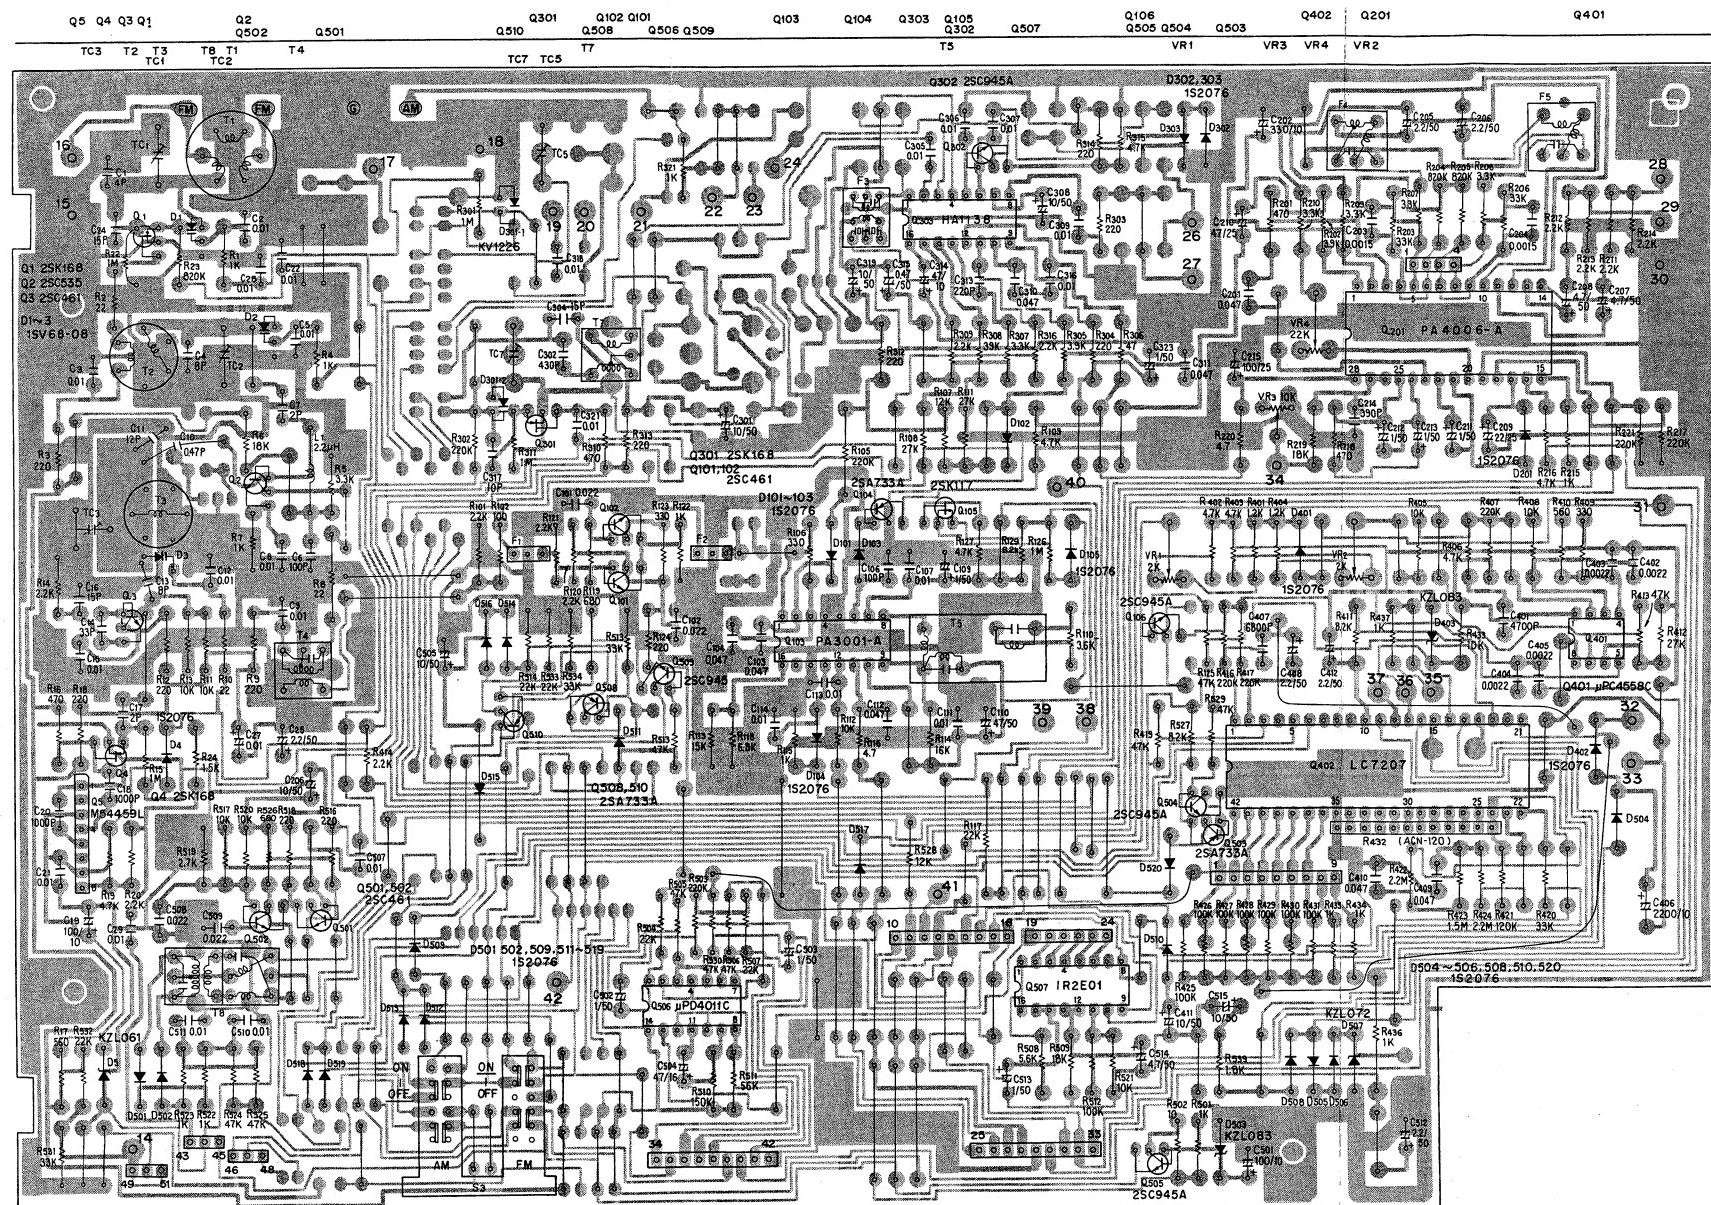

FL Assembly (GWX-652)

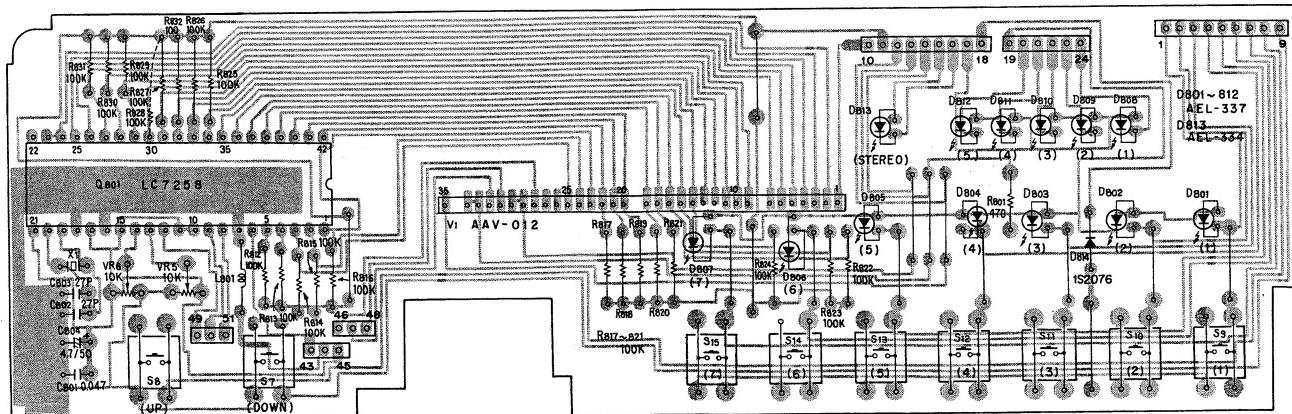

Power Supply Assembly B

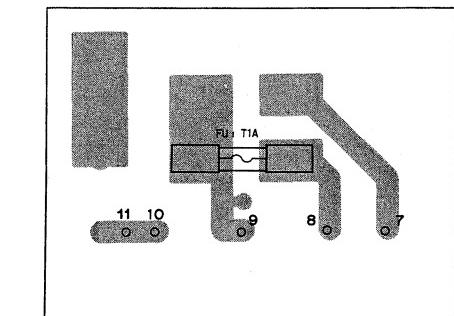

A

B

C

D

TX-720

1

2

3

4

5

6

6. P.C. BOARDS CONNECTION DIAGRAM

A

A

B




B

C

C

D

D

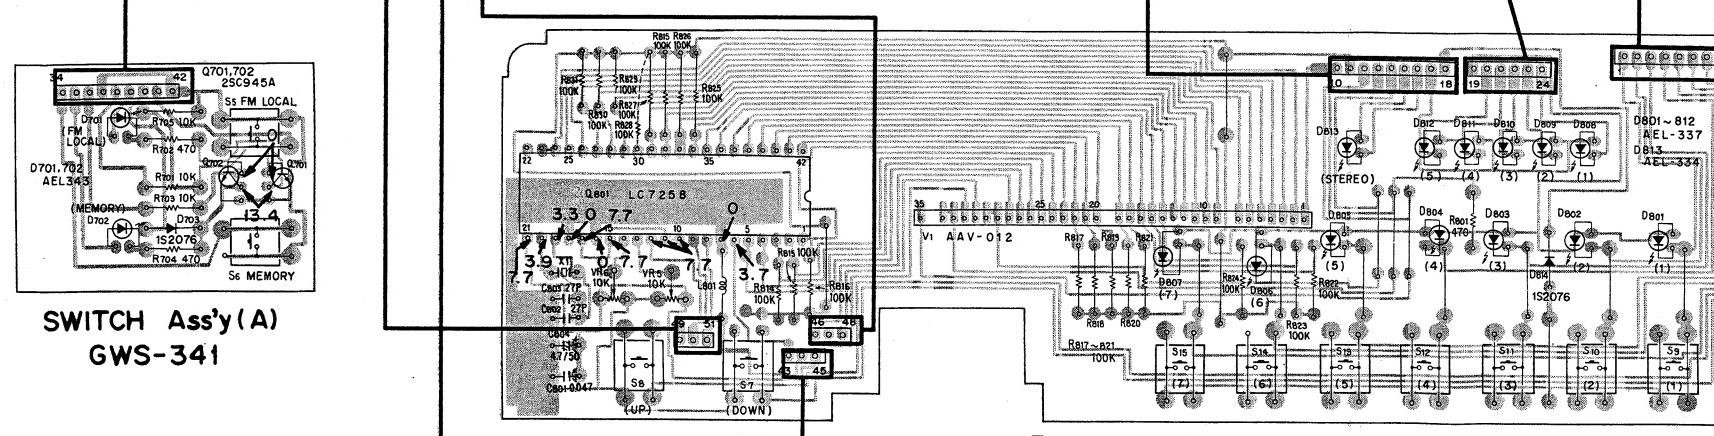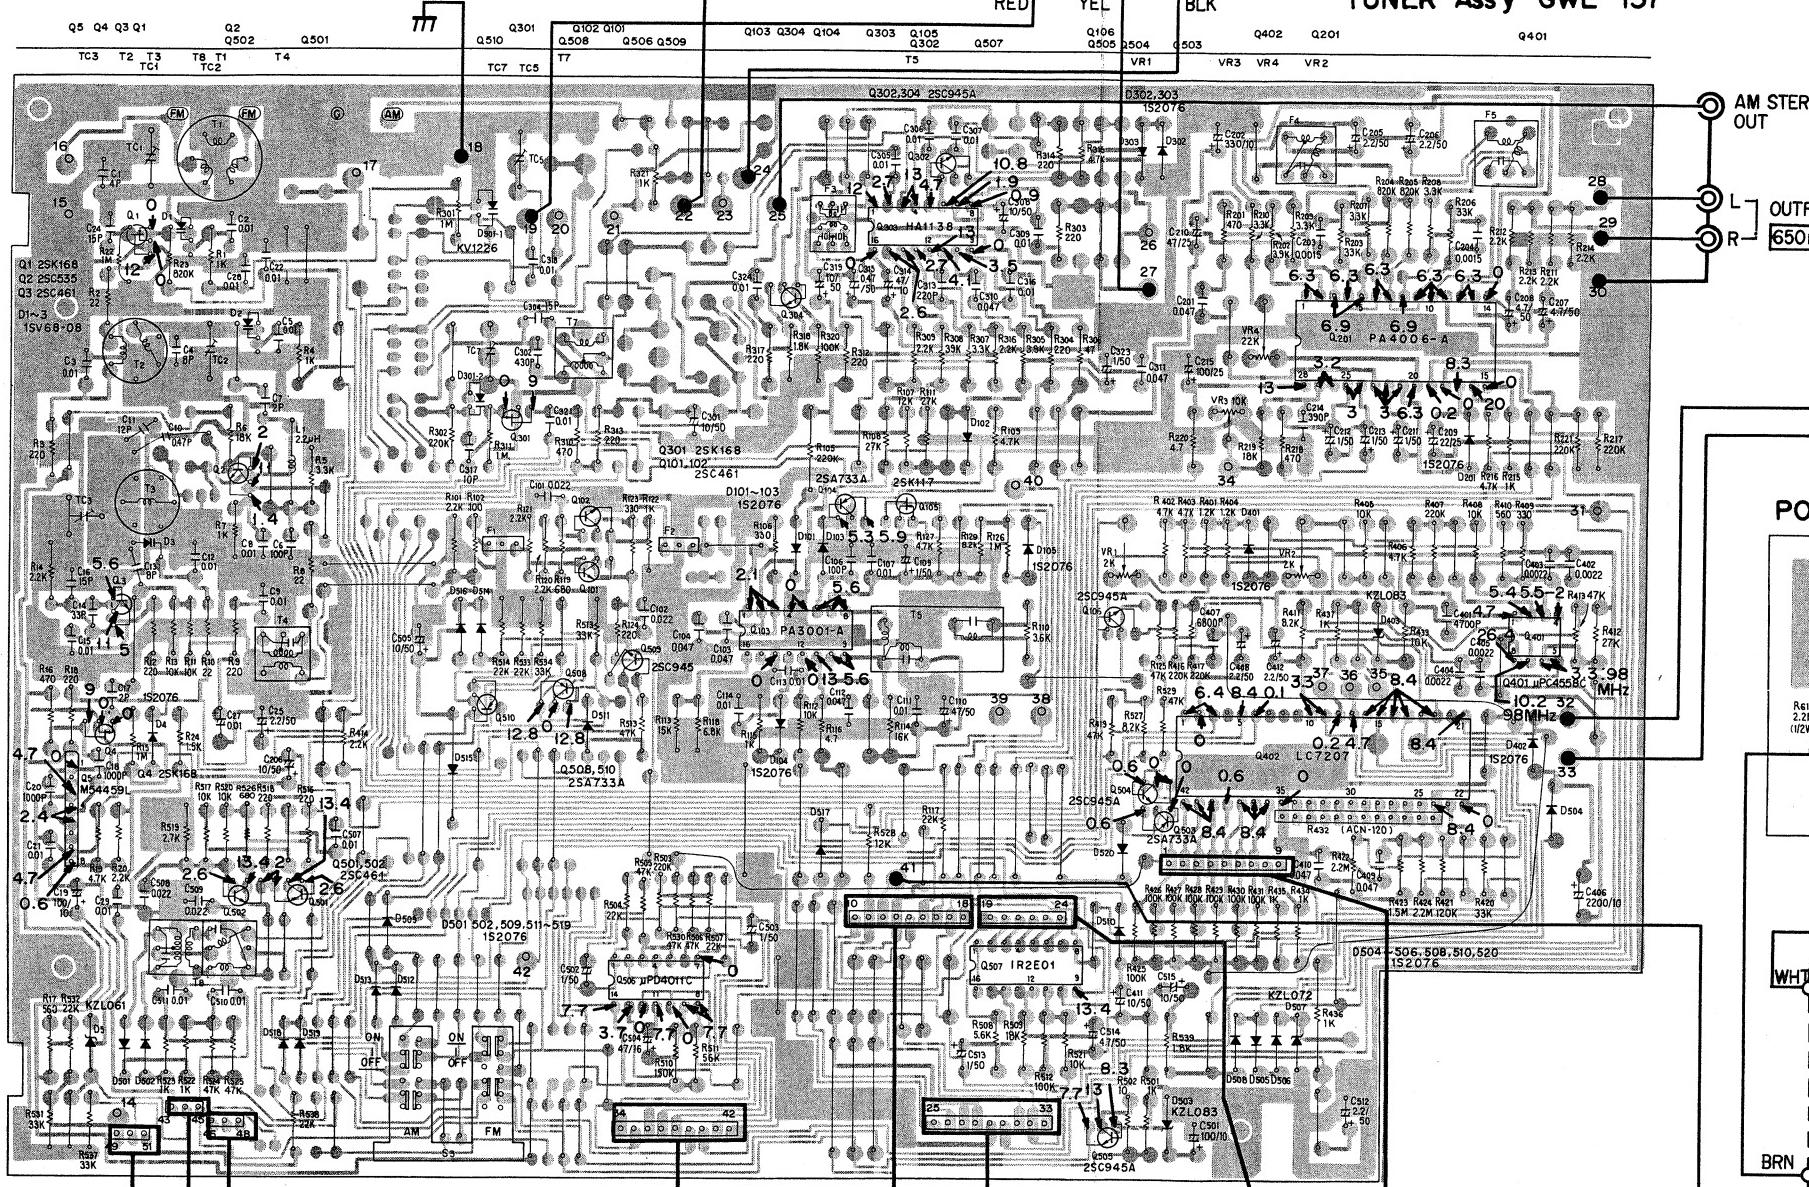

1

2

3

4

5

6